

IF A TIMBER SILL SECTION IS SPECIFIED IT WILL BE LEFT 50MM OVER LENGTH AT EACH END AS STANDARD. THE ENDS THIS WILL BE LEFT SQUARE AND WILL REQUIRE CUTTING TO SUIT AROUND BRICK WORK ON SITE.

IF ANYTHING DIFFERENT FROM THIS IS REQUIRED, IT IS THE CUSTOMER'S RESPONSIBILITY TO SPECIFY EXACTLY WHAT IS NEEDED.

ANY CUTS MADE TO THE TIMBER THAT EXPOSE END GRAIN MUST BE ADEQUATELY END GRAIN SEALED TO PREVENT UPTAKE OF MOISTURE INTO THE TIMBER.

IT IS ALSO ADVISABLE THAT THE SILL END IS SEALED TO THE WALL USING MASTIC AFTER INSTALLATION.

IF NO TIMBER SILL SECTION IS PRESENT THEN APPLY MASTIC SEALER BETWEEN THE ENDS OF THE BOTTOM ALUMINIUM SECTION AND THE WALL.


FRAME JAMB

MASTIC OR QUADRANT UP THE FRAME JAMB

EXTERNAL CORNER OF APERTURE

CUT HERE TO SUIT, THEN APPLY MASTIC

TIMBER SILL SECTION

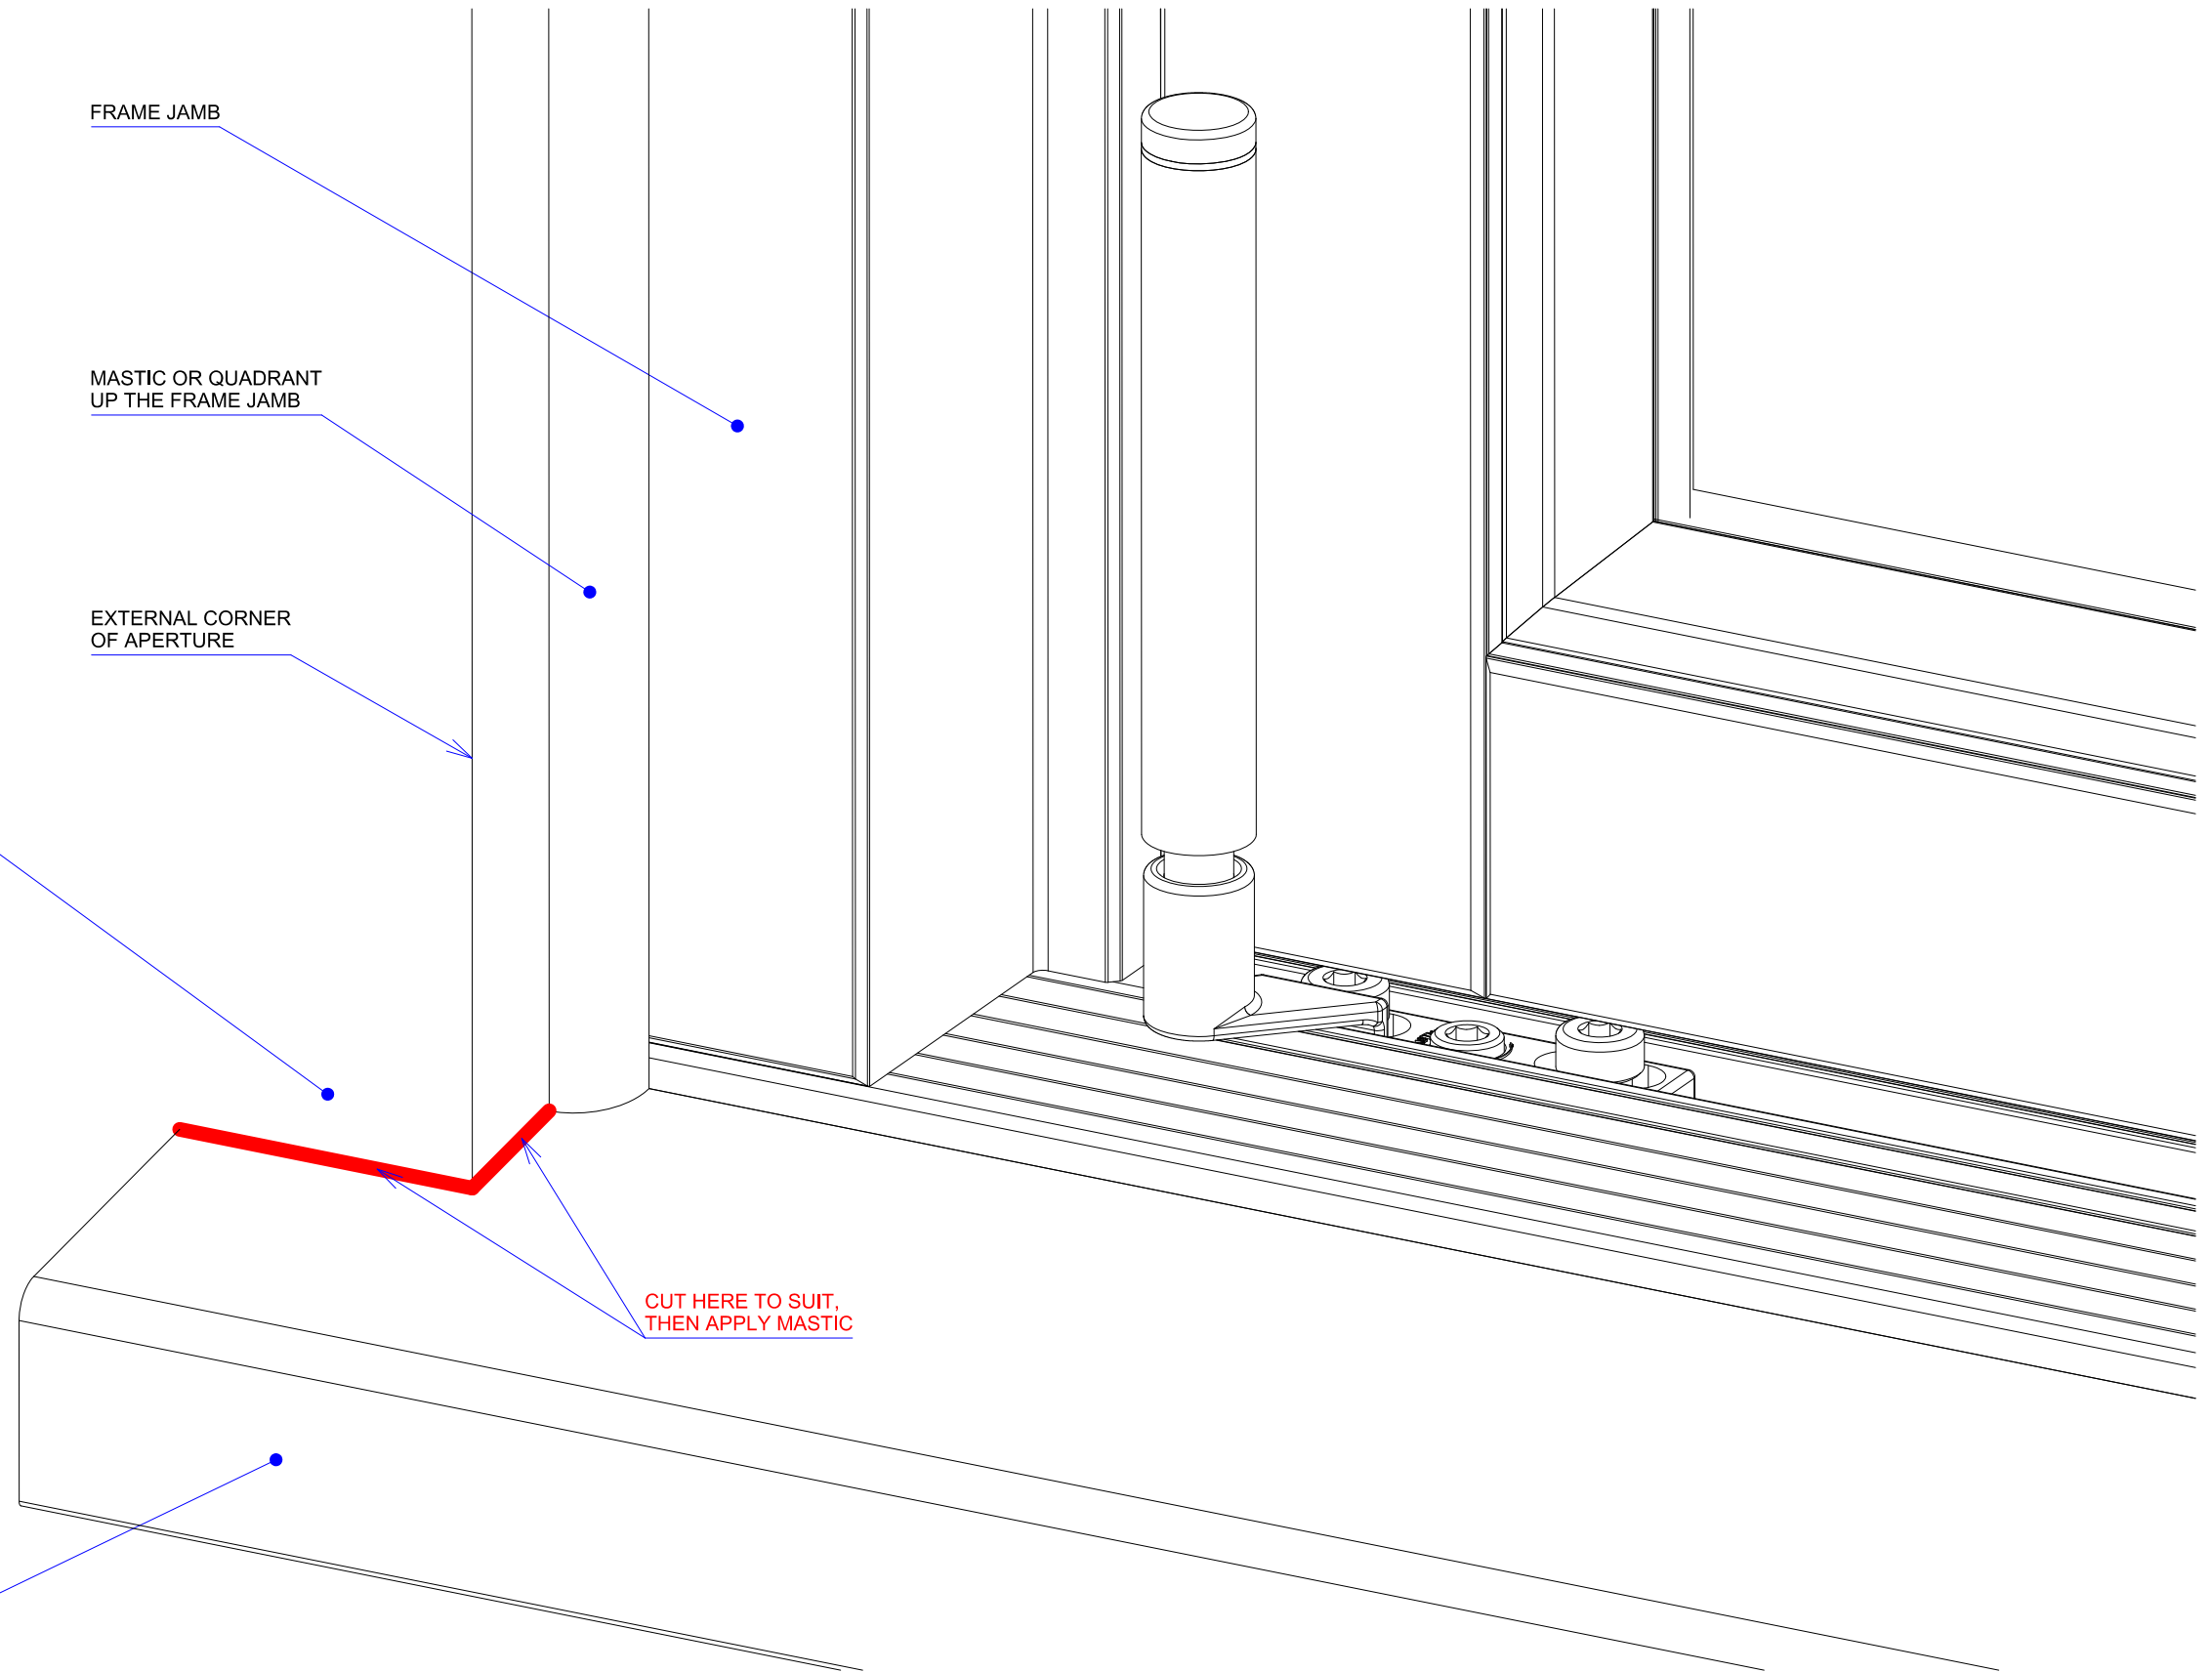

MASTIC, QUADRANT OR END GRAIN SEALER IS NOT SUPPLIED

	BIFOLD DOORS	AUTHOR Luke Wynder		
		DATE 10/05/2012		
	SILL HORN DETAIL			
A3	-			1